



# TUV T8

## TUV 55W HO 1SL

TUV T8 lamps are double-ended UVC (germicidal) lamps used in professional water and air disinfection units. TUV T8 lamps offer almost constant UV output over their complete lifetime, for maximum security of disinfection and high system efficacy. Moreover, they have a long and reliable lifetime, which allows maintenance to be planned for in advance.

### Product data

#### • General Characteristics

System Description	High Output
Cap-Base	G13
Bulb	T26
Main Application	Disinfection
Useful Life	9000 hr

#### • Electrical Characteristics

Lamp Wattage	55 W
Lamp Wattage Technical	54 W
Lamp Voltage	86 V
Lamp Current	0.77 A

#### • Environmental Characteristics

Mercury (Hg) Content	2.0 mg
----------------------	--------

#### • Light Technical Characteristics

Color Designation (text)	-
--------------------------	---

#### • UV-related Characteristics

UV-C Radiation	17.5 W
----------------	--------


#### • Product Dimensions

Base Face to Base Face A	894.6 (max) mm
Insertion Length B	899.3 (min), 901.7 (max) mm
Overall Length C	908.8 (max) mm
Diameter D	28 (max) mm


#### • Product Data

Order code	928049504003
Full product code	928049504003
Full product name	TUV 55W HO 1SL
Order product name	TUV 55W HO 1SL/6
Pieces per pack	1
Packing configuration	6
Packs per outerbox	6
Bar code on pack - EAN1	8711500618665
Bar code on outerbox - EAN3	8711500618672
Logistic code(s) - 12NC	928049504003
Net weight per piece	131.000 gr



Dimensional drawing



Product	A (Max)	B (Min)	B (Max)	C (Max)	D (Max)
TUV TL-D 55W HO	894.6	899.3	901.7	908.8	28



## Photometric data

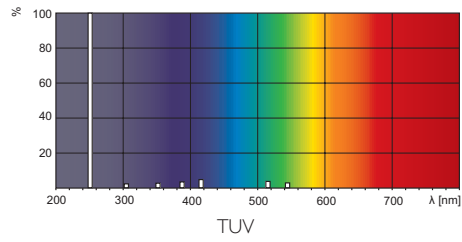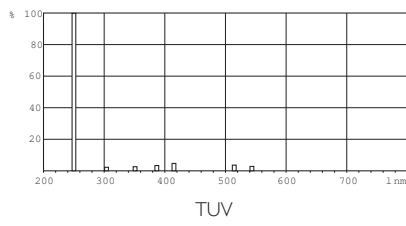

© 2011 Koninklijke Philips Electronics N.V.  
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

[www.philips.com/lighting](http://www.philips.com/lighting)

2011, July 25  
data subject to change